

# Model FDCSTC03

- 2 Channel Combiner
- Star Point Type
- FM Band 87.5-108 Mhz


The star point combiner basically consists of connecting several transmitters in parallel to a single antenna system through suitable bandpass filters, each tuned to each individual transmitter frequency

The parallel connection is obtained by means of coaxial lines of determined length, to provide for adequate isolation between transmitters.

## TYPICAL SPECIFICATIONS

<b>Model</b>	FDCSTC03 – Type STAR POINT
<b>Impedance</b>	50 Ohm
<b>Frequency Range</b>	87.5+108 MHz
<b>VSWR ±150 KHz</b>	1.1:1 Max
<b>Insertion Loss</b>	at $f_0$ 0.8 dB Max
<b>Return Loss ±150 KHz</b>	≤ -26 dB
<b>Isolation ±2.0 MHz</b>	≥ 30 dB
<b>No. of input</b>	2
<b>No. of output</b>	1
<b>Connectors</b>	Input N female Output N or 7/16"
<b>Max Power</b>	300 W X 2 CHANNELS
<b>Temperature Range</b>	-20°C ÷ +50°C
<b>Color</b>	Enamel gray ral 7001
<b>Materials</b>	Aluminium, silver brass, copper, PTFE, stainless steel, silver plated (min 12µ thickness)

- Distortion - Free
- Starpoint system with triple pass-band cavity filters
- Low loss, high isolation
- Natural convection
- Optional group delay equalizer

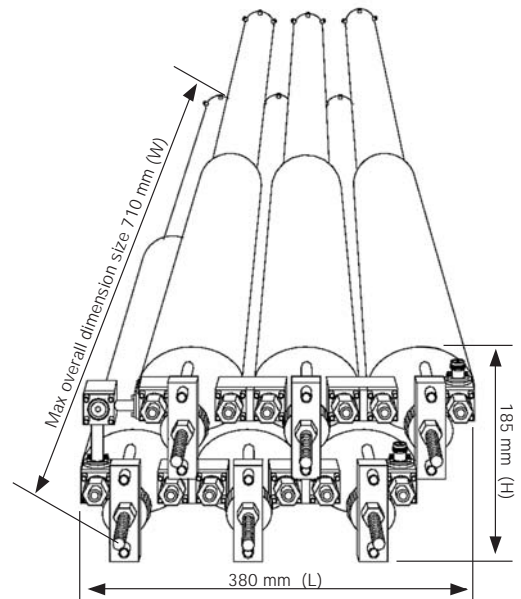


## No Rack Version

<b>Dimensions</b>	185 x 380 x 710 mm (7.3 x 15 x 28 inch) (HxLxW)
<b>Net Weight</b>	≈ 18 Kg (triple cavity)

## Rack Version (optional)

<b>Panel Size</b>	5 HE (1 HE = 44.45 mm)
<b>Net Weight</b>	≈ 18 Kg (triple cavity)

Typical Shape for S11 and S21 for single filter

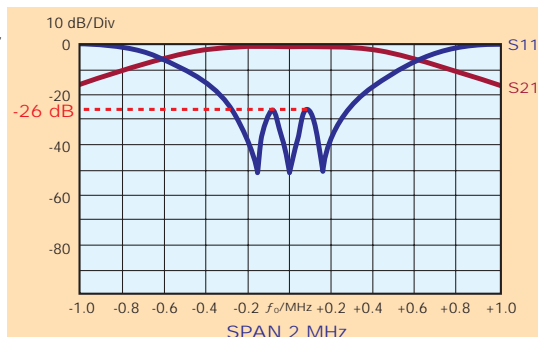

"These specifications are subject to change without notice"