

Model FQCSTC5

- 4 Channel Combiner
- Star Point Type
- FM Band 87.5-108 Mhz


The star point combiner basically consists of connecting several transmitter in parallel to a single antenna system through suitable bandpass filters, each tuned to each individual transmitter frequency.

The parallel connection is obtained by means of coaxial lines of determined length, to provide for adequate isolation between transmitters.

TYPICAL SPECIFICATIONS


Model	FQCSTC5 – Type STAR POINT
Impedance	50 Ohm
Frequency Range	87.5÷108 MHz
VSWR ±150 KHz	1.1:1 Max
Insertion Loss	at f_0 0.25 dB Max
Return Loss ±150 KHz	≤ -26 dB
Isolation ±1.5 MHz	≥ 30 dB
No. of input	3
No. of output	1
Connectors	Input 1+5/8" Output 3+1/8"
Max Power	6 KW X 4 CHANNELS
Temperature Range	-20°C + +50°C
Color	Enamel gray ral 7001
Materials	Aluminium, silver brass, copper, PTFE, stainless steel, silver plated (min 12μ thickness)

- Distortion - Free
- Starpoint system with triple bandpass cavity filters
- Low loss, high isoaltion
- Natural convection
- Optional group delay equalizer

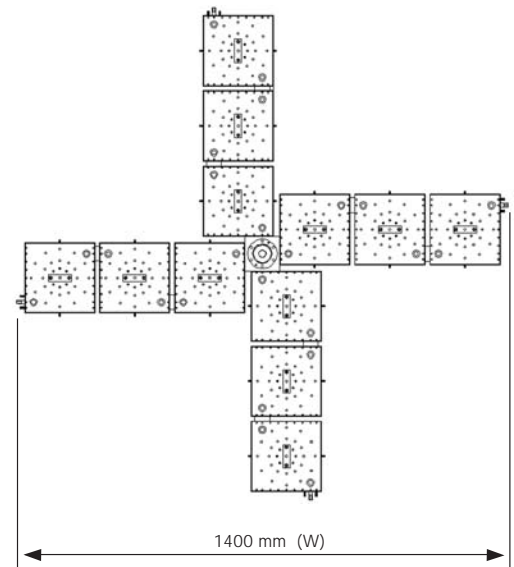

Dimensions	1400(Max size) x 2200 x 2200 mm (55.1(Max size) x 86.6 x 86.6 inch) (H x L x W)
Net Weight	≈ 260 Kg

Typical shape for S11 and S12 for single filter

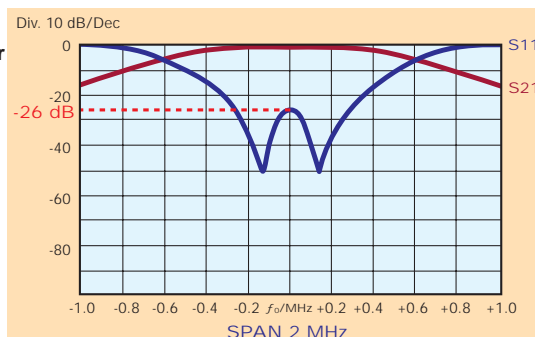

"These specifications are subject to change without notice"