






## FDCSDC05 Starpoint Combiner

- 2 Channel starpoint combiner, 2 Bandpass filters per channel
- Up to 500W power input per channel
- Optional 8RU rack mounting kit available
- Low loss, very rugged, stable tuning over time, compact design
- Conservatively rated, high quality materials & precision crafted parts
- Designed to combine multiple frequencies into a single antenna system and also minimize inter-mods, harmonics or spurious emissions

### Typical Specifications

Model	FDCSDC05
Number of Channels	2
Max Power input per channel	500W
Bandpass filters per channel	2
Impedance	50 Ohm
Frequency Range	87.5-108MHz
Insertion Loss	-0.42dB to -0.6dB
Return Loss +/- 150kHz	≤-26dB
Isolation +/- 2.5MHz	Typical ≤-30dB
Connectors	7-16 DIN Female Input/Output
Working Temperature	-4°F to 122°F
Weight	30kg/66lbs
Dimensions	710 mm / 27.9" inches (H) 355 mm / 14" inches (L) 280 mm / 11" inches (W)

All features & specifications are subject to change without notice

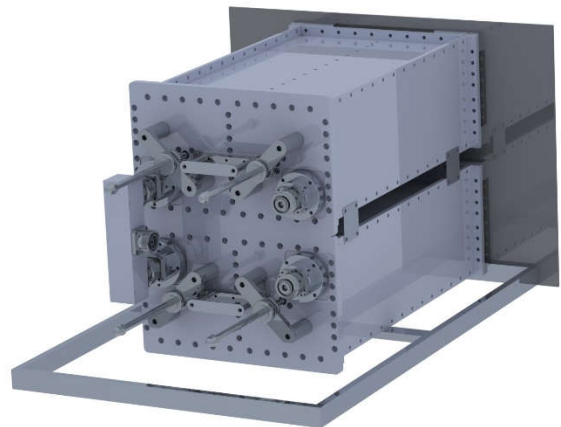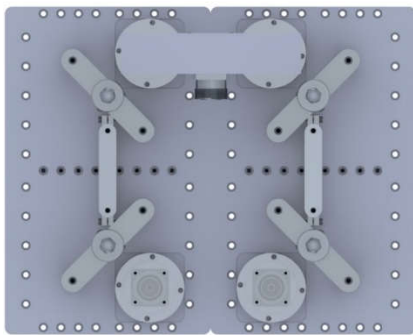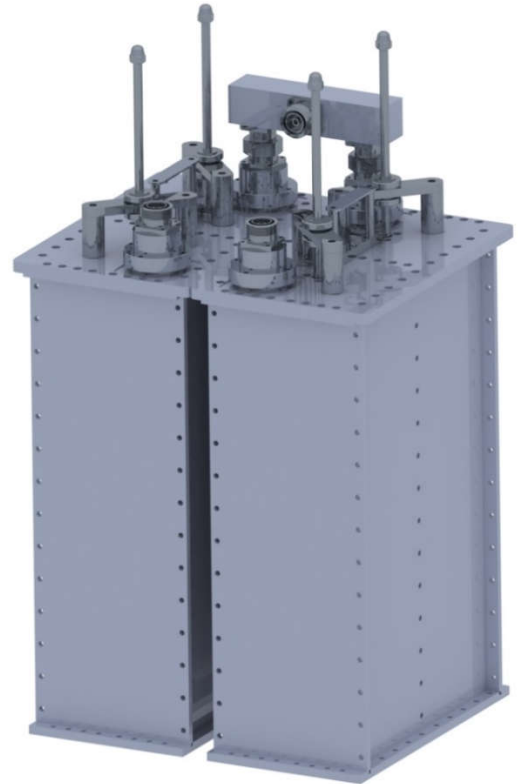

Optional 8RU Rack Mounting Kit shown