




FDCSDC2R Starpoint Combiner

- 2 Channel starpoint combiner, 2 Bandpass filters per channel
- Up to 1500W power input per channel
- Optional 12RU rack mounting kit available
- Low loss, very rugged, stable tuning over time, compact design
- Conservatively rated, high quality materials & precision crafted parts
- Designed to combine multiple frequencies into a single antenna system and also minimize inter-mods, harmonics or spurious emissions

Typical Specifications

Model	FDCSDC2R
Number of Channels	2
Max Power input per channel	1500W
Bandpass filters per channel	2
Impedance	50 Ohm
Frequency Range	87.5-108MHz
Insertion Loss	-0.25dB to -0.32dB
Return Loss +/- 150kHz	≤-26dB
Isolation +/- 2.5MHz	Typical ≤-30dB
Input Connectors	7-16 DIN Female
Output Connector	7/8" Flange
Working Temperature	-4°F to 122°F
Weight	42kg/92.5lbs
Dimensions	714 mm / 28" inches (H) 534 mm / 21" inches (L) 483 mm / 19" inches (W)

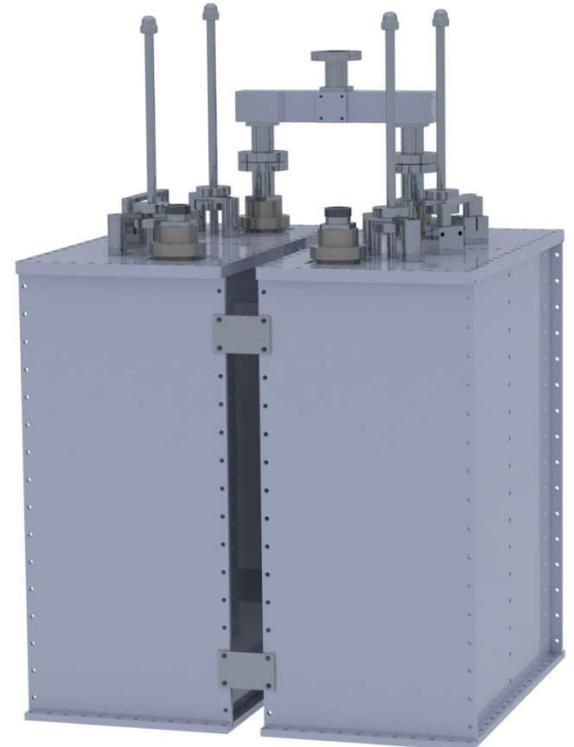

All features & specifications are subject to change without notice

Optional 12RU Rack Mounting kit shown

