




FDCSTC05 Starpoint Combiner

- 2 Channel starpoint combiner, 3 Bandpass filters per channel
- Up to 500W power input per channel
- Optional 8RU rack mounting kit available
- Low loss, very rugged, stable tuning over time, compact design
- Conservatively rated, high quality materials & precision crafted parts
- Designed to combine multiple frequencies into a single antenna system and also minimize inter-mods, harmonics or spurious emissions

Typical Specifications

Model	FDCSTC05
Number of Channels	2
Max Power input per channel	500W
Bandpass filters per channel	3
Impedance	50 Ohm
Frequency Range	87.5-108MHz
Insertion Loss	-0.6dB to -0.8dB
Return Loss +/- 150kHz	≤-26dB
Isolation +/- 1.5MHz	Typical ≤-30dB
Input Connectors	7-16 Din Female
Output Connector	7-16 Din Female
Working Temperature	-4°F to 122°F
Weight	40kg/88lbs
Dimensions	589 mm / 23" inches (H) 356 mm / 14" inches (L) 408 mm / 16" inches (W)

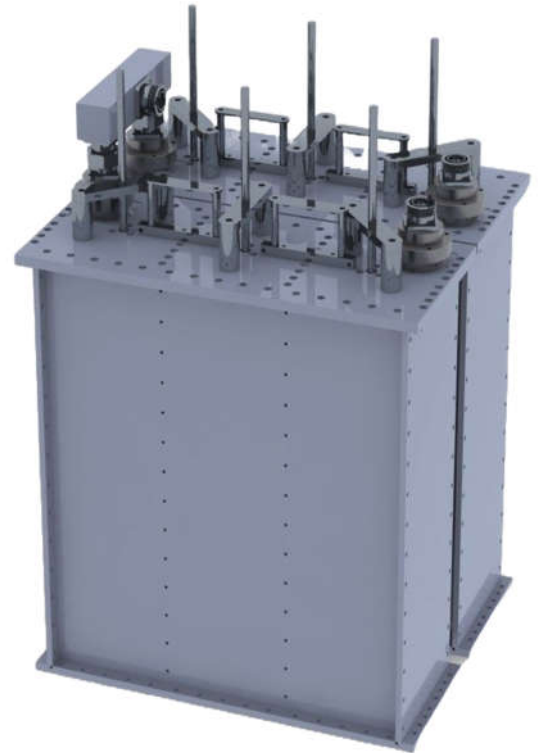

All features & specifications are subject to change without notice

Optional 8RU Rack Mounting Kit Shown

