



# FFTC03 Band Pass filter


- Up to 300W, triple cavity RF Filter for FM Radio Stations, 87.5 -108MHz
- Optional 4RU rack mounting kit available
- Low loss, very rugged, stable tuning over time
- Compact design with minimal space required
- Conservatively rated, high quality materials & precision crafted parts
- Designed to minimize inter-mods, harmonics or spurious emissions

## Typical Specifications

Model	FFTC03
Max Power	300W
Impedance	50 Ohm
Frequency Range	87.5-108MHz
Insertion Loss	-0.80 to -0.98dB Max
Return Loss +/- 150kHz	≤-26dB
Rejection +/- 1.5MHz	Typical ≤-30dB
Connectors	N-Type Female Input/Output
Working Temperature	-4°F to 122°F
Weight	9kg/20lbs
Dimensions	770mm / 30" inches (H) 280mm / 11" inches (L) 90mm / 3 1/2" inches (W)



All features & specifications are subject to change without notice

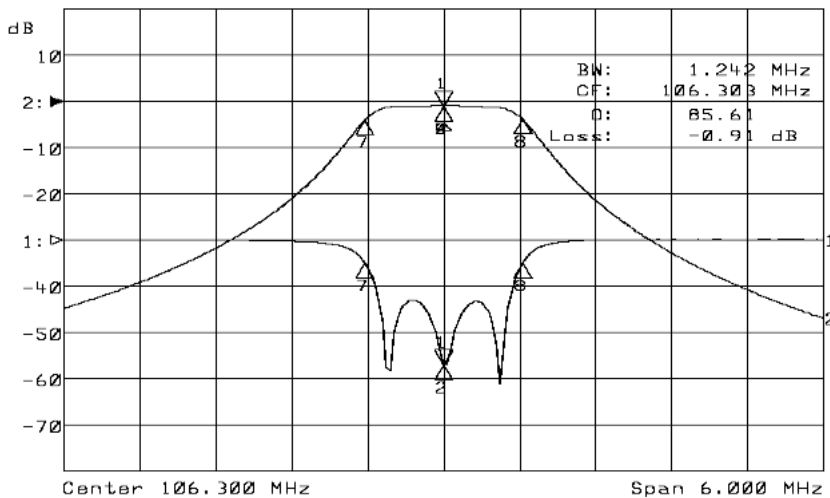

Optional 4RU Rack Mounting Kit Shown