




FDCSTC03 Starpoint Combiner

- 2 Channel starpoint combiner, 3 Bandpass filters per channel
- Up to 300W power input per channel
- Optional 8RU rack mounting kit available
- Low loss, very rugged, stable tuning over time, compact design
- Conservatively rated, high quality materials & precision crafted parts
- Designed to combine two frequencies into a single antenna system and also minimize inter-mods, harmonics or spurious emissions

Typical Specifications

Model	FDCSTC03
Number of Channels	2
Max Power input per channel	300W
Bandpass filters per channel	3
Impedance	50 Ohm
Frequency Range	87.5-108MHz
Insertion Loss	-0.8dB to -1.3dB
Return Loss +/- 150kHz	≤-26dB
Isolation +/- 1.5MHz	Typical ≤-30dB
Input Connectors	N-Type Female
Output Connector	7-16 Din Female
Working Temperature	-4°F to 122°F
Weight	18kg/39.6lbs
Dimensions	185 mm / 7.3" inches (H) 380 mm / 15" inches (L) 710 mm / 28" inches (W)

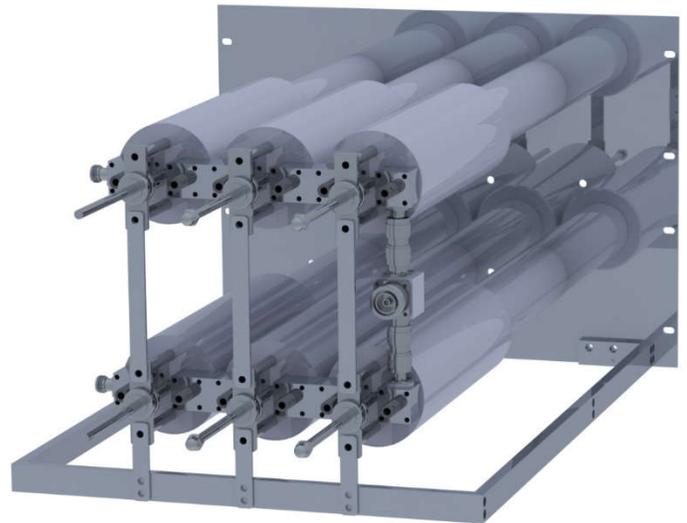

Optional 8RU Rack Mounting Kit Shown

All features & specifications are subject to change without notice

